



www.gst.uk.com
info@gst.uk.com

IC Card Lock A-737UIA1000-RR



Features

- Solid brass handle and solid brass cover.
- Cast-steel Integrative structure, solid and durable
- Lock system can be linked with the reception desk of management system of Germany Fidelio Company, we have obtained the permission certificate from Fidelio company.
- IC card is Germany Siemens encrypted card with high security and durability
- Alarm function: long beep alarm will warn the guest or waiter, when the latches of the lock is maliciously operated or the door is not closed properly by guest.
- Micro-CPU located in back body of lock, Reading-CPU located in front body of lock, it's modularization design, stable running and easy maintenance.
- Normal-open state can be set for meeting.
- Outside handle is fixed while in locking state, the handle can be turned only in unlocking state
- Deadbolt indicating: as deadbolt draw out, LED will flash in red to show someone in the room
- Suitable for holiday village and hotel.

Technical Specification

Power supply	4 standard AA alkaline batteries
Static consumption	<15uA
Dynamic consumption	110mA~180mA
Emergency unlocking	The door can be opened even if the deadbolt works.
Battery life	About one year in normal state.
Open time	Turning the handle to open the door after inserting the card is valid only once within 10 seconds, after that the door will be locked again automatically. The buzzer in the lock will beep to warn the user if the door isn't closed after opening the door within 15 seconds.
Reliability of card insertion	No accident for 1000 times of continuous card insertion.
Insert illegal card	The circuit in the lock will not be damaged when any illegal card is inserted in the lock, especially full metal card.
Low voltage warning	When CPU working voltage is less 4.8V, the lock can still be opened dozens of times before the batteries are replaced.
Mechanical key	The separate emergency mechanical structure will allow the opening by the mechanical key in emergency.
Installation request	Only to be installed in the wooden door, with the thickness between 38mm and 55mm, and if the door surface is decorated, the distance between the decorative edge and the edge of the door must be over 120mm.

GST England Lion Court, Staunton Harold Hall, Melbourne Road, Ashby de la Zouch, Leicestershire, England LE65 1RT Tel: +44 1283 225 478 Fax: +44 1283 220 690

GST Dubai ZA04, Jebel Ali Free Zone, P.O.Box 17998, Dubai UAE
Tel: +971 (0)4 8833 050 Fax: +971 (0)4 8833 053



GST China 80, Changjiang East Road, Economic & Technology Development Zone Qinhuangdao, Hebei, China Tel: +86(0)335 850 2383 Fax: +86 (0)335 850 7588




www.gst.uk.com
info@gst.uk.com

IC Card Lock A-737UIA1000-RR

Installation

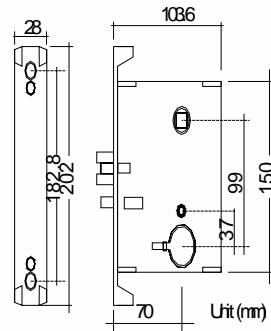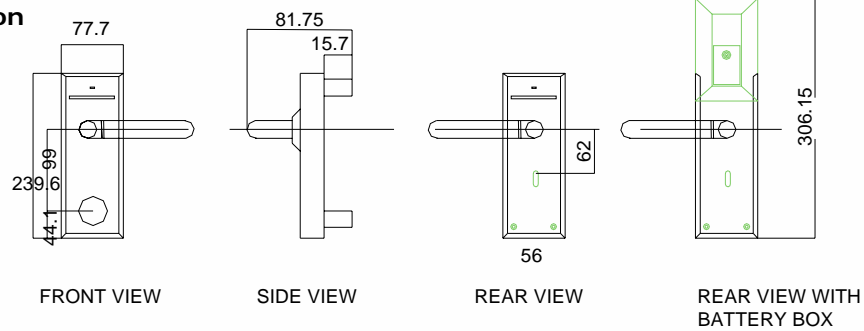

System Configuration

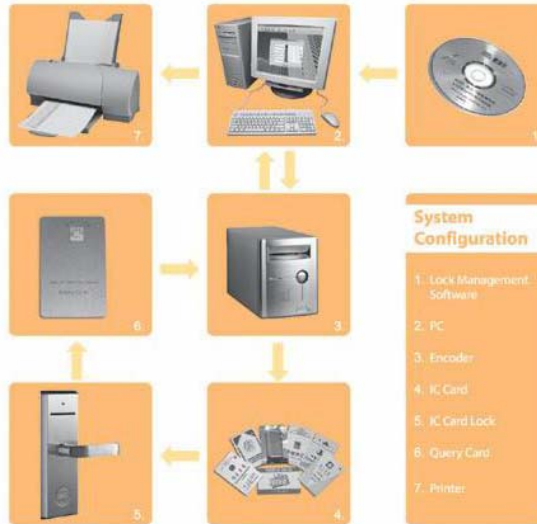

Ordering Information

Part No	Description
A-737UIA100RR	IC Card Lock, Stainless Steel, brass polished, U Shape

Note: Specifications are subject to change without notice

GST England Lion Court, Staunton Harold Hall, Melbourne Road, Ashby de la Zouch, Leicestershire, England LE65 1RT Tel: +44 1283 225 478 Fax: +44 1283 220 690

GST Dubai ZA04, Jebel Ali Free Zone, P.O.Box 17998, Dubai UAE
Tel: +971 (0)4 8833 050 Fax: +971 (0)4 8833 053

GST China 80, Changjiang East Road, Economic & Technology Development Zone Qinhuangdao, Hebei, China Tel: +86(0)335 850 2383 Fax: +86 (0)335 850 7588