



## Floor Distributors

### DJ6315 Series

#### Features and Benefits


- Floor distributor for intelligent video-audio entry systems.
- DJ6315B is surface-mounted four-branch distributor, and DJ6315AB is surface-mounted two-branch distributor.
- Providing bus relay between entry panel and indoor monitors and powering indoor monitors.
- Audio transfer between entry panel and indoor monitors.
- Insulating entry panel and indoor monitors for protection against short circuit on branch power supply, bus and audio channel.
- Text Message acknowledged function from concierge panel

#### Technical Specifications

- Operating Voltage:  
14.5VDC~18.5VDC(DJ6315B/AB/Y/AY);  
16.5VDC~18.5VDC(DJ6339B/2/4)
- Standby Current:  
≤15mA(DJ6315B/AB/Y/AY)  
≤75mA(DJ6339B/2/4)
- Maximum Current:  
≤50mA(DJ6315B/AB/Y/AY)  
≤150mA(DJ6339B/2/4)
- Number of Branches Number:  
Branches 4 branches(DJ6315B)  
2 branches (DJ6315AB)
- Ambient Temperature: -25°C~+70°C
- Relative Humidity: 10%~95%, non-condensing
- Dimensions: ≤50mA(DJ6315B/AB/Y/AY)

#### Installation

##### Wall-mounted

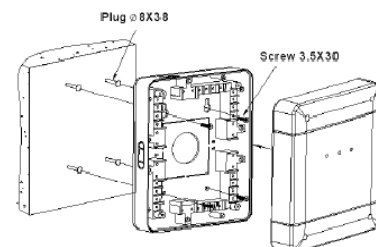

##### Flush-mounted

