



Hands Free Video Handset

DJ6950 Series

Features and Benefits

- Intelligent video handset available in colour and B/W.
- Can store up to 32 visitor photos
- With voice mail feature
- Built-in Auto dialer features up to 5 telephone memory
- Call from extension handset in the same flat and block
- Direct to call concierge panel at security office
- Direct to call main entry panel and monitor
- Optional received text information from concierge panel
- With silence mode switch with LED indicator
- Built-in Door bell connection, and 8 security port and panic bottom
- Self door lock release or through entry panel
- Audio and Video Display adjustments
- Selectable 8 ringing tone
- Security Mode password
- Auxiliary 12Vdc power supply output
- With 18Vdc bell output up to 50mA current
- Optional wall or flush mount
- With voice mail feature


Technical Specifications

- Operating Voltage: 14.5VDC-18.5VDC
- Standby Current : ≤ 120 mA (DJ6950)
 ≤ 260 mA (DJ6950BBBF/6950H/6950H/F)
 ≤ 380 mA (DJ6950B/T/6950B/FT/6950H/T/6950H/FT)
 ≤ 820 mA (DJ6950)
- Operating Current: ≤ 960 mA
(DJ6950B/6950B/F/6950H/6950H/T)
 ≤ 1080 mA (DJ6950B/T/6950B/FT/6950H/T/6950H/FT)
(Exclude doorbell, lock open and alarm interface power consumption)
- Ambient Temperature: $-10^{\circ}\text{C} - +40^{\circ}\text{C}$
(Handset with alarm interface, remote enable/disable function)
 $-10^{\circ}\text{C} - +55^{\circ}\text{C}$ (Handset with alarm interface, remote enable/disable function)
- Relative Humidity: 10% - 95% $^{\circ}\text{C}$ non-condensing
- Dimension: 302mmx192mmx16.5mm(flash mount)
302mmx190mmx 65.5mm(wall mount)

Installation


Wall mounted

- Fix the mounting plate on the wall
- Connect the terminal with cable
- Terminal should be insert responding slot, and fix handset.

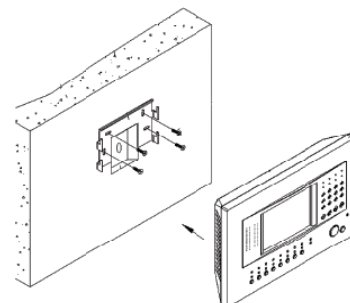


Flush mounted

- Fix flush mount box on the wall
- (Flush mount size; 288mmx184mmx 70mm)
- Fix the mounting plate in FLush Mount Box, should be wired to terminal
- Terminal should be insert correct slot
- INsert hansey in the Flush Mount Box

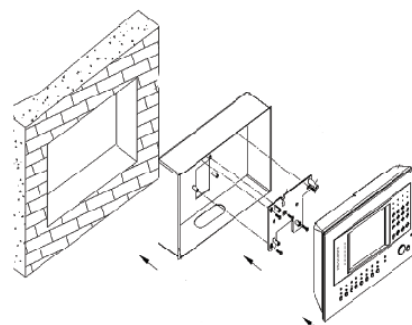

Wiring

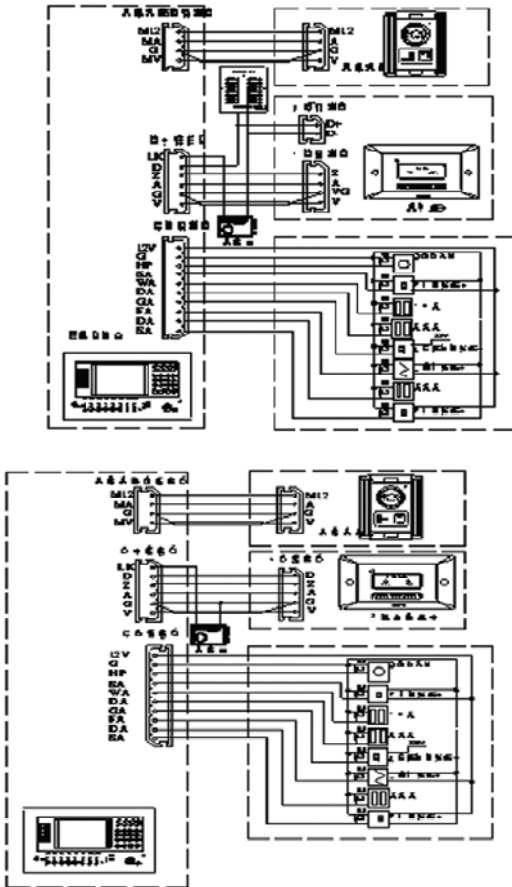

Hands Free Handset Range

Part No.	LCD	Alarm interface	doorbell	Photo storage	Remote control	Telephone voice alarm	leave word	installation
DJ6950	5.6" color	Help	Yes	--	--	--	--	wall mount
DJ6950B	5.6" color	8Zone	Yes	--	--	--	--	Wall Mount
DJ6950B/F	5.6" color	8Zone	Yes	--	Yes	--	--	Wall Mount
DJ6950B/T	5.6" color	8Zone	Yes	32PIC	--	--	--	Wall Mount
DJ6950B/FT	5.6" color	8Zone	Yes	32PIC	Yes	--	--	Wall Mount
DJ6950H	5.6" color	8Zone	Yes	--	--	Yes	Yes	Wall Mount
DJ6950H/F	5.6" color	8Zone	Yes	--	Yes	Yes	Yes	Wall Mount
DJ6950H/T	5.6" color	8Zone	Yes	32PIC	--	Yes	Yes	Wall Mount
DJ6950H/FT	5.6" color	8Zone	Yes	32PIC	Yes	Yes	Yes	Wall Mount
DJ6950/Y	5.6" color	Help	Yes	--	--	--	--	Flush Mount
DJ6950B/Y	5.6" color	8Zone	Yes	--	--	--	--	Flush Mount
DJ6950B/F/Y	5.6" color	8Zone	Yes	--	Yes	--	--	Flush Mount
DJ6950B/T/Y	5.6" color	8Zone	Yes	32PIC	--	--	--	Flush Mount
DJ6950B/FT/Y	5.6" color	8Zone	Yes	32PIC	Yes	--	--	Flush Mount
DJ6950H/Y	5.6" color	8Zone	Yes	--	--	Yes	Yes	Flush Mount
DJ6950H/F/Y	5.6" color	8Zone	Yes	--	Yes	Yes	Yes	Flush Mount
DJ6950H/T/Y	5.6" color	8Zone	Yes	32PIC	--	Yes	Yes	Flush Mount
DJ6950H/FT/Y	5.6" color	8Zone	Yes	32PIC	Yes	Yes	Yes	Flush Mount

Ordering Information

Part Number: DJ6801C
Description: 4" Colour Video Handset with security interface

Part Number: DJ6811C
Description: 4" Colour Video Handset with 7 zones security interface

Part Number: DJ6811AC
Description: 4" Colour Video Handset with security interface and door bell connection

Part Number: DJ6821C
Description: 4" Colour Video Handset with 7 zones security interface and door bell connection

Part Number: DJ6801C5
Description: 5" Colour Video Handset with security interface

Part Number: DJ6811C5
Description: 5" Colour Video Handset with 7 zone security interface

Part Number: DJ6811AC5
Description: 5" Colour Video Handset with security interface and door bell connection.

Part Number: DJ6821C5
Description: 5" Colour Video Handset with 7 zones security interface and door bell connection.